


DIRECTO

Ref. : 18-10 / 18-11 / 18-12


Stainless Steel

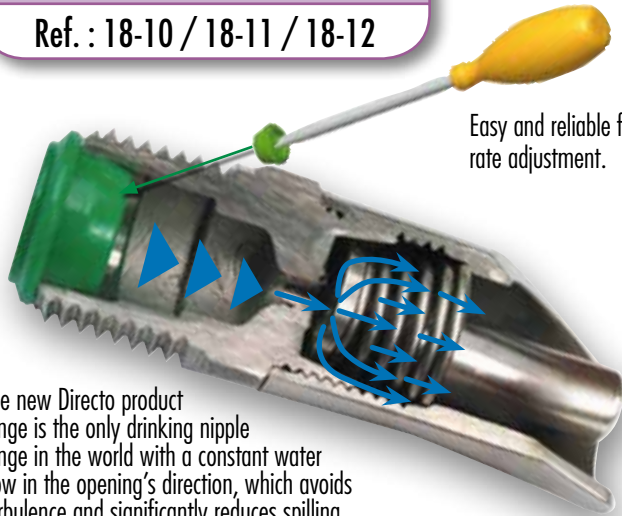


Easy and reliable flow rate adjustment.

The new Directo product range is the only drinking nipple range in the world with a constant water flow in the opening's direction, which avoids turbulence and significantly reduces spilling.

Directo 50
For piglets



Directo 70
For early weaners



Directo 90

For store pigs, sows (farrowing pens and sows with farrow) and boars



Easily disassembled

Mounting Accessories

Ref. : A-804 & A-801

A-804

20° mounting bracket for Directo 50, 70 and 90 (for farrowing pens only).



A-801

45° mounting bracket for Directo 90



Made of unbreakable galvanised cast iron. 50 mm (2") centre-to-centre for 8 mm screws

POUSTUBE

Ref. : 18-26 / 18-28



18-26 : Female

18-28 : Male

Stainless steel finger moistener. 1/2" (15x21 mm) female fitting. Packed per 20 - 2.4 kg (5.3 lbs)

Flow rate adjustment in Poustube's upper half.

DYRECT

Ref. : 18-27



Stainless steel finger moistener.

Male fitting 3/8" (12 x 17).

REF	DESIGNATION	PACKAGING
18-10	Directo 90 for store pigs, sows (farrowing pens) and boars Mini. flow rate : 1.4 l/min (0.36 USG/mn) Max. flow rate : 12.8 l/min (3.38 USG/mn)	Per box of 20
18-11	Directo 70 for early weaner. Flow rate Mini.: 0.8 l/min (0.21 USG) Maxi.: 8.5 l/min (2.24 USG)	Per box of 20
18-12	Directo 50 for piglets. Flow rate Mini.: 0.9 l/min (0.23 USG) Maxi.: 4.7 l/min (1.23 USG)	Per box of 20
18-26	POUSTUBE FEMALE. Stainless steel finger moistener. Mini. flow rate: 0,6 l/min. (0.16 USG) Fitting 1/2" (15x21) female.	Per box of 20
18-28	POUSTUBE MALE. Stainless steel finger moistener. Mini. flow rate: 0,6 l/min. (0.16 USG) Fitting 1/2" (15x21) male.	Per box of 20
18-27	DYRECT. Stainless steel finger moistener. Mini. flow rate: 0,3 l/mn - Maxi : 3,5 l/mn. Fitting 3/8" (12x17) male.	Per box of 20
A-804	20° Mounting bracket for DIRECTO	
A-801	45° Mounting bracket for DIRECTO	

Benefits of Directo

- Less water consumption compared to other nipple type drinkers: less spilling (meaning less water in the manure).
- Reliability : nearly unlimited service life: made of four stainless steel parts.
- Easily maintained: The wear parts (seal and spring) are easily replaced.
- Quick learning process.




Poustube : the Perfect Solution for Watering Your Sows

A simple and efficient solution

- Will not harm your sows, by virtue of its special design.
- Never jams: the mechanism is out of reach of the sow's snout.

FOR THE MOUNTING

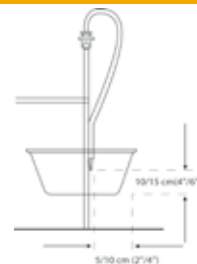

Mounting the POUSTUBE in a trough for sows or "dry feeder".

Variable flow rate:
2 to 9 l/min
(0.53 to 2.38 USG/min)